


Checklist for Abrasive Wheel Equipment Grinders

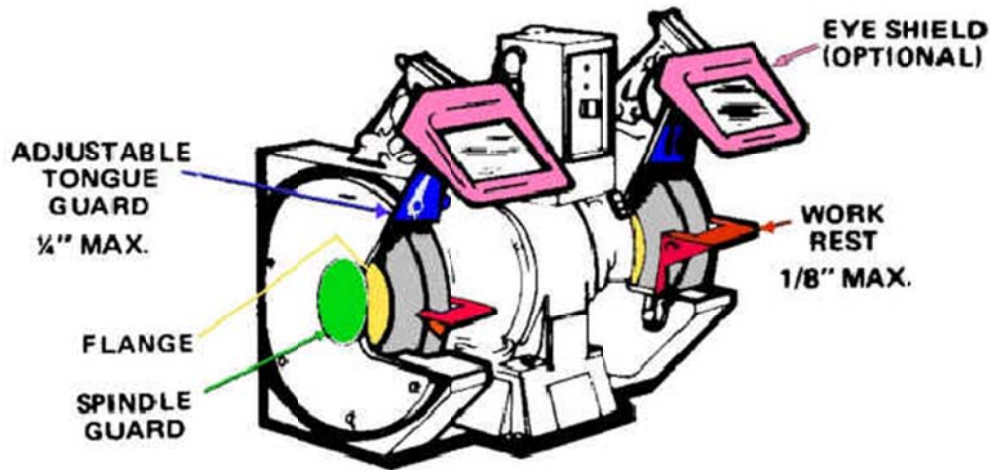

Standard CCR Title 8	Description	YES	NO
From the Abrasive Wheel standard			
3577(b) & (c)	Do side guards cover the spindle, nut and flange and 75% of the wheel diameter?		
3577(e)	Is the work rest used and kept adjusted to within 1/8-inch (0.3175cm) of the wheel?		
3578(g)	Is the adjustable tongue guard on the top side of the grinder used and kept to within 1/4-inch (0.6350cm) of the wheel?		
3580(a)	Is the maximum RPM rating of each abrasive wheel compatible with the RPM rating of the grinder motor?		
3580(a)	Before new abrasive wheels are mounted, are they visually inspected and ring tested?		
3576(a)	Are bench and pedestal grinders securely mounted?		
From other CA-OSHA standards			
3273(a)	Is cleanliness maintained around grinders?		
3382(a)	Are goggles or face shields always worn when grinding?		
2522.26* See Below	Does each grinder have a disconnect readily accessible?		
	Does each electrically operated grinder have a permanent, continuous and effective path to ground?		

NOTES:

1. This is only a guide. Refer to CCR Title 8, 3576-3583 for additional information on Abrasive Wheels.
2. A mark in the "NO" column indicates a need for corrective actions.
3. * This code reference may not apply depending on the type of equipment. Refer to CCR Title 8, 2522.26 for additional information.